




A Green Solutions Company™

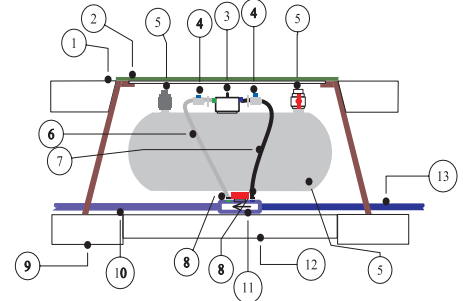

Downloadable CAD drawings and product specifications available at www.ezflorfertilizing.com/3-4.asp

High Capacity Features

	EZ010	EZ017	EZ025
Tank Capacity (Approx.) - Liquid	10 Gal. (38 liters)	17.5 Gal. (66 liters)	25 Gal. (95 Liters)
Tank Capacity - Water Soluble	100 lbs. (45 kg)	175 lbs. (80 kg)	250 lbs. (112 kg)
Dimensions (LWH) Inches	32 x 12 x 18	36 x 15 x 20	36 x 19 x 25
Dimensions (LWH) cm	81 x 30 x 46	91 x 38 x 51	91 x 48 x 63
Approx. Weight:	65 lbs. (29.5 kg)	90 lbs. (40.8 kg)	120 lbs. (54.4 kg)
Maximum Operating Pressure		100 PSI	
Typical Feed Ranges		0 to 20 or 0 to 12 GPH	
Minimum Operating Pressure		NA	
Connection Options:			
Ball Valve Connection			Dry water soluble and/or liquid products
Saddle Connection With Valve			Dry water soluble and/or liquid products
Other engineered connections available upon request			

Ball Valve Connector or Engineered Connection Required for Installation

Tank Sizing

The tank sizing is based on the amount of concentrated product storage that will be required between tank refills.

*The amount of water soluble fertilizer that can be loaded into this model is dependent upon the solubility of the fertilizer and following the suggested fill instructions for this unit. The range listed is the maximum tank capacity using a high quality, water soluble fertilizer. Lesser amounts may be used without affecting the proportioning performance of the unit. Due to variations in the tank fabrication process, the liquid tank capacity may vary from the listed value. Therefore published tank capacities are approximate.

High Capacity Models

Warranty: Five (5) years except under heavy pressure conditions or excessive temperature conditions where summer temperatures exceed 100 F (38 C). Heavy pressure conditions are when static line pressure exceeds 100 PSI (6.9 bars). See other detailed warranty and installation limitations at www.ezflorfertilizing.com/warranty.asp

Includes:

- Bypass fitting, tubing and tubing clamps
- Pressure relief valve - rated 150 PSI (10 bars)
- Air release vent valve and tank cradle (to maintain level)
- Tank fill valve and lower drain valve (not pictured)
- Two (2) EZ Shut-off valves (Inflow and outflow shutoff)

Does Not Include:

Irrigation coupling connector. An EZ-FLO ball valve connector (CBV) or an approved engineered connection is **REQUIRED** to ensure proper proportioning for all applications.

This system connects directly to the irrigation piping after the back flow prevention device and the tank is designed for use under constant pressure. EZ-FLO's patented flow process automatically adjusts to changes in water pressure and water flow without changing fittings. This product is designed to feed both sprinkler and drip irrigation zones for commercial, municipal, sports field, golf course, grower and residential applications. This system is designed for the delivery of products that are designated as non-hazardous.

A code compliant back flow prevention device is required for installation. Installation must follow local and state plumbing codes. Unless otherwise specified, a pressure vacuum breaker is the minimum back flow prevention device required according to University of Southern California - Foundation for Cross Connection Control and Hydraulic Research.